


MNH 310 701

HAFNER


3/2-way solenoid valve with NAMUR 1 - 1/4" interface - G 1/4" - monostable - NC - air spring return - with manual override

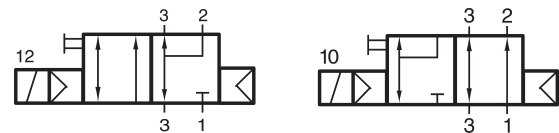

Technical data

Port size / Connection	G 1/4"
Medium	Compressed air
Positional stability	Monostable
Temperature range	-10°C...+50°C
Operating pressure	2...10 bar
Air flow rate (P1=6 bar, ΔP=1 bar)	1250 l/min
Mounting type	In-line
Power consumption	3 W / 5 VA
Ways	3/2-ways
Material body	Aluminum
Switching time	50 ms 6 bar, +20°C
Actuation	Electrically actuated
Port orientation	NAMUR-interface

MNH 310 701

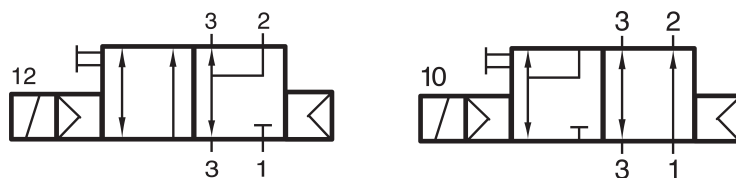

HAFNER

3/2-way solenoid valve with NAMUR 1 - 1/4" interface - G 1/4" - monostable - NC - air spring return - with manual override

